

WPG series

Switch guard for switch series WP



DISTINCTIVE FEATURES

Prevent accidental lever operation
Latching



ENVIRONMENTAL SPECIFICATIONS

- Salt spray test: 96 hours (IEC 68-2-11)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)



MATERIALS

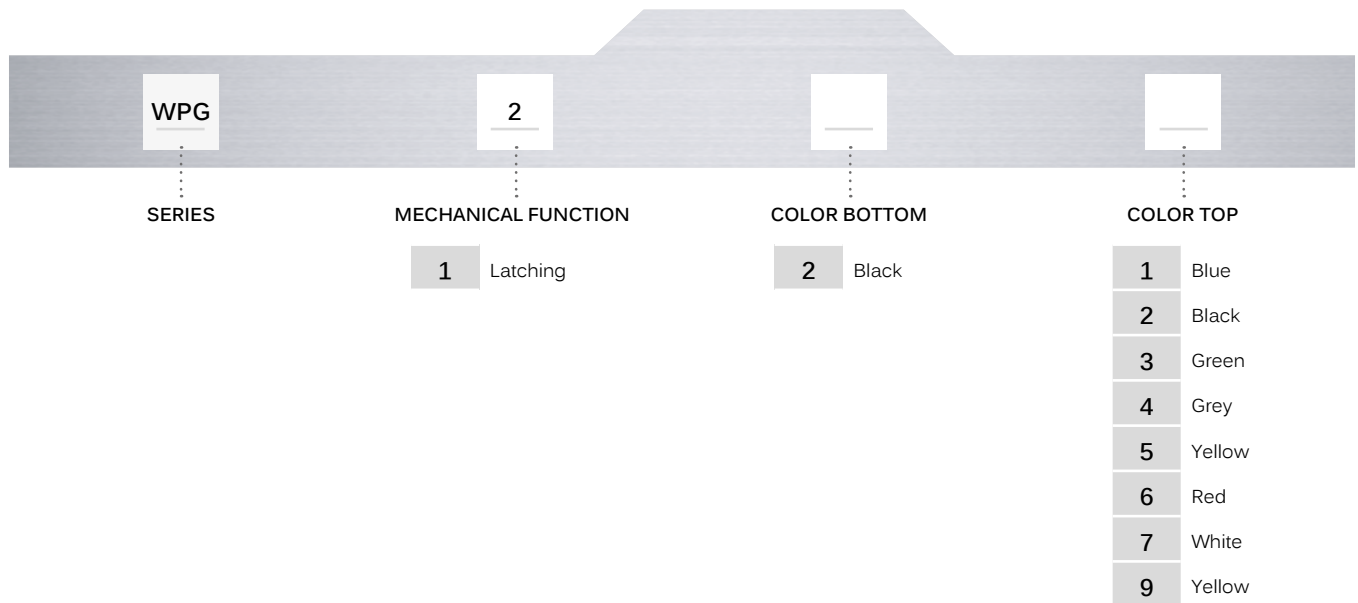
- Support plate: black chrome plated brass
- Guard: inox



WPG series




Switch guard for switch series WP

BUILD YOUR PART NUMBER



ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

-  **Notice:** please note that not all combinations of above numbers are available. Refer to the following pages for further information.
-  **A sealing boot** is available to protect the switches against frost and sand (P/N U5125). See "Sealing Boots" section of website.
-  **Mounting accessories:** Standard hardware supplied: 1 hex nut 14 mm (.551) across flats and 1 O-Ring.

WPG series

Switch guard for switch series WP

DIMENSIONS

